

PSS5 100mm 5W Ceiling Speaker

Overview

The PSS5 is a 100mm (4") in-ceiling speaker with built-in 100Vrms line transformer and 22 μ F DC blocking capacitor. The 100V transformer reduces line losses for longer line distances and allows easy parallel connection of multiple loudspeakers. The blocking capacitor allows DC monitoring of the speaker circuit.

The 100mm speaker is designed for a wide frequency response of 110-13kHz. The unit has multiple power taps of 0.33W, 0.66W, 1.25W, 2.5W, and 5W, for different applications, depending on room size and ambient noise conditions. The all-metal body is painted in an attractive RAL9016 white colour. The spring clamps make for an easy and secure installation and ease of service access.

The PSS5 is an ideal choice for industrial and commercial applications such as in hotels, schools, offices, hospitals, and factories. Note, however, that this speaker is not appropriate in situations where exposure to moisture, extreme humidity, severe vibration, dust, smoke, static electricity, or steam is expected.



Features

- Quick-fit mounting clamps for ceiling installation.
- Built-in 100Vrms transformer with protective cover.
- 22 μ F bipolar blocking capacitor included.
- 100mm (4") speaker unit.
- Power taps of 0.33W, 0.66W, 1.25W, 2.5W and 5W @ 100V.
- All-metal components include grille and baffle.
- Powder coated finish in RAL9016 White.

Specification

Audio Power taps available at 100Vrms:

0.33W, 0.66W, 1.25W, 2.5W, and 5W

Sensitivity:

92dB (1W @ 1m)

Ceiling Hole Size for installation:

152 - 155mm diameter

Dimensions:


180 diameter x 91mm height

Weight:


0.7Kg

Installation Steps

1. Cut a 152mm diameter hole in the ceiling.
2. Ensure that all three spring clamps are in the *Install position*, as shown below.
3. Fit audio cabling to the speaker terminal block as required, observing the correct polarity
4. Set the initial power tap as desired. The default setting, on the side of the transformer, is 0.33W. Unplug the connector and fit to the desired tap.
5. Push the speaker assembly upwards into the ceiling hole until all three clamps automatically engage, as shown below.
6. Test the sound system and if necessary, remove the speaker to adjust the power tap accordingly.

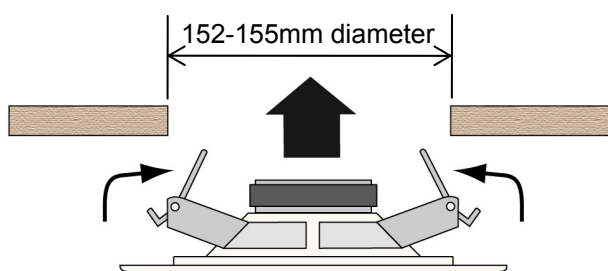

3 quick-mount clamps in *Install position*

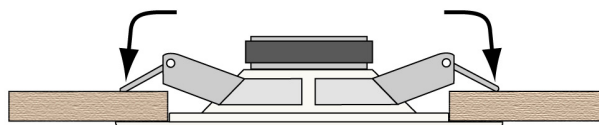

Clamps automatically engage ceiling

To remove the speaker assembly from the ceiling, gently pull the speaker downwards to disengage the clamps. Do not allow the speaker to be supported by the cables alone.

Order Code:

Product	Order Code
100mm 5W Ceiling Speaker	PSS5