

CONVENTIONAL

Ionisation Smoke Detector
Model 1151EIS



Product Overview

Features

- Low profile design
- Low current draw
- Remote LED option
- Two alarm LEDs providing 360° visibility
- Stable performance in high air velocities
- Removable cover for ease of maintenance
- Simple plug-in installation
- Compatible with standard B401 mounting base
- Built-in test switch
- Tamper-resistant
- Suitable for use in up to Zone 0 environments
- Approved for use with Zener safety barriers or galvanic isolators
- BASEEFA approval to EEx ia IIB T5
- Tested and approved to EN54 - 7:2000 (Amendment 1)



Description

Model 1151EIS ionisation smoke detectors use state-of-the-art sensing chambers and SMD circuitry for maximum reliability. These detectors are designed to afford open area protection and are for use in hazardous areas where potentially explosive atmospheres are likely to arise (confirm classification of equipment required with your responsible authority).


1151EIS detectors are designed to be used with compatible panels only and must be used in conjunction with a compatible zener barrier or galvanic isolator.

Each detector has two integral alarm LEDs to provide local visual indication of detector status. Once the detector senses a fire, it latches in alarm and remains in this condition until it is reset by a momentary power interruption.

Model 1151EIS smoke detectors include a tamper feature that prevents removal from the base without the use of a tool. In addition, these detectors can be tested by activating an internal reed switch with a test magnet. This test simulates smoke in the detector and performs a full check of the operating circuitry.

Architect/Engineer Specifications

Typical 1151EIS System Diagram

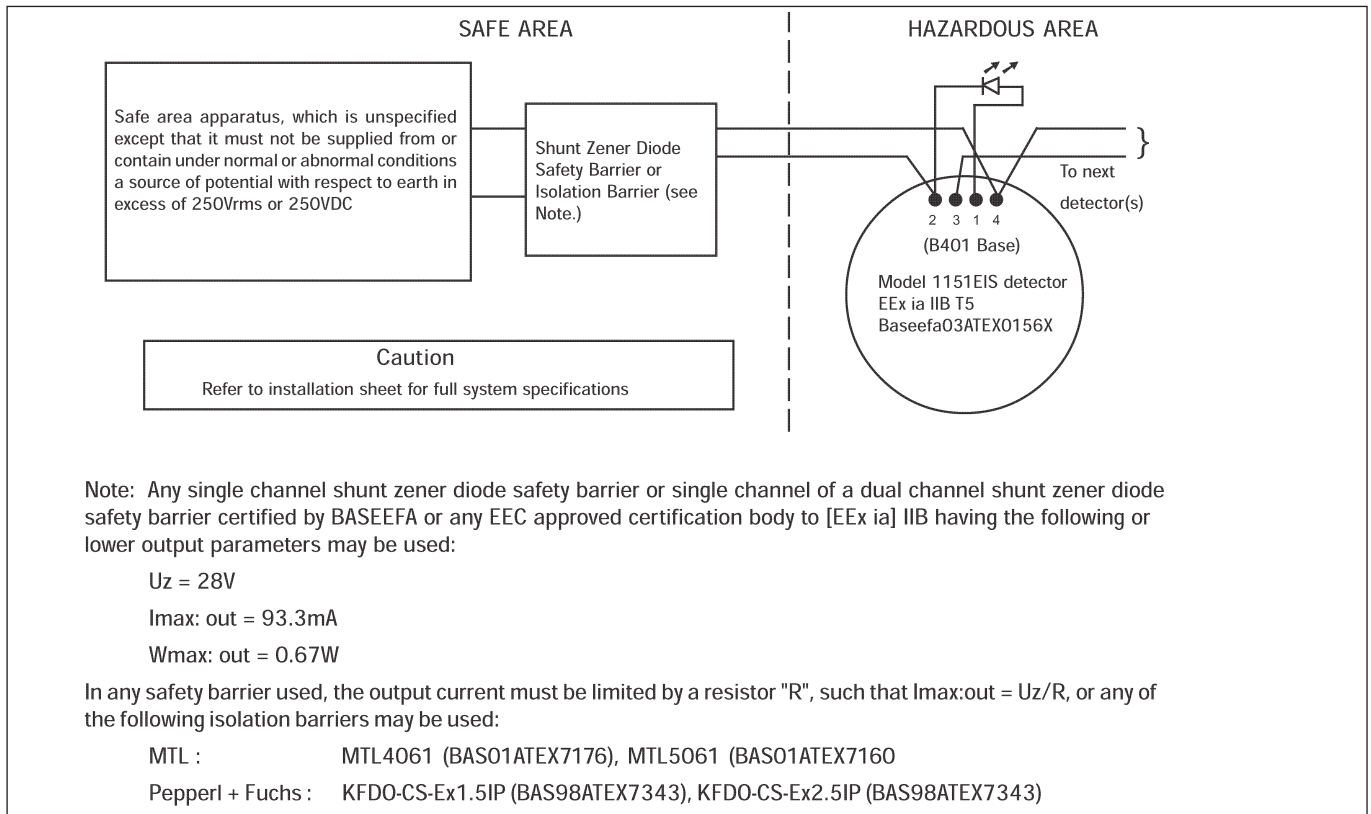

Electrical Specifications

Operating Voltage

15 to 32VDC

Standby Current (maximum)

30µA at 24VDC

Latching alarm reset by momentary power interruption

Environmental Specifications

Operating Temperature Range

-10°C to 55°C

Operating Humidity Range

10% to 93% Relative Humidity (non-condensing)

IP Ratings

On application

Intrinsic Safety Rating

EEx ia IIB T5

Mechanical Information

Height

43mm

Diameter

104mm

Weight

110g (excluding base)

Product Range

Compatible bases

B401, B401DG

System Sensor Europe (Technical Services)

Charles Avenue

Burgess Hill

RH15 9TQ

United Kingdom

Tel: +44 (0)1444 238820

Fax: +44 (0)1444 248123

sse.technical@systemsensoreurope.com

www.systemsensoreurope.com

Copyright © 2005 System Sensor. All rights reserved. All technical data is correct at time of publication and is subject to change without notice.

All trademarks acknowledged. Installation information: in order to ensure full functionality, refer to the installation instructions as supplied.